Product Environmental Aspects Declaration



Date of publication



http://canon.jp Canon Inc. TEL 03-3758-2111 Email eco@web.canon.co.jp EP and IJ printer (PCR-ID:AD-04)

Canon imagePRESS C60

1) EP Printing 2) CL Print Speed: 60ppm 3) BW Print Speed: 60ppm (A4)

4) Paper size: A3 maximum 5) Standardized automatic duplexing



Environmental load of the Use stage is

that the product prints 2,150,400 images

Environmental load by copypaper is not

based on the supposition


for five years.

included.

Consumption and discharge in a life cycle	All the stage sum totals				
Global warming	4.23t				
(CO ₂ equivalent)	(3.36t)				
$\begin{array}{c} \mbox{Acidification} \\ (\mbox{SO}_2 \mbox{ equivalent}) \end{array}$	6.51kg (4.87kg)				
Energy resources	82.3GJ				
(crude oil equivalent)	(66.7GJ)				

%Figures in () indicated environmental impact including recycle effect . *Note3

Warming load CO₂ equivalent of each stage (kg)

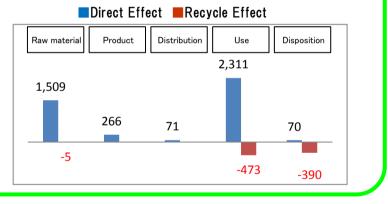

Notes:

- 1 Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
- 2 Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR: Product Category Rule. Visit EcoLeaf website under JEMAI homepage at http://www.ecoleaf-jemai.jp/eng/ for details.
- 3 Recycle Effect illustrates an indirect influence to other products/services.
- 4 Basic Units used for calculations are based on Japan domestic data at this time, due to a lack of base data to establish localized Basic Unit for overseas locations adequately.

This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

[Supplemental environmental information]

Certified Environmental Standards: Japan Eco Mark , International Energy Star Program, EU RoHS. This product and its main components are produced in our factories certified to ISO14001 management system standard.

PCR review was conducted by : PCR Deliberation Committee, Jan. 1st, 2008,

Name of reprentative: Youji Uchiyama, Univercity of Tsukuba, Graduate School

Independent verification of the declaration and data, according to ISO14025 □internal ■external Third party verifier: Hiroyuki Uchida

Programme operator: Japan Environmental Management Association for Industry, ecoleaf@jemai.or.jp

In the case of an business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written. The EcoLeaf is an environmental labeling program that belongs to the ISO-Type III category.

Form 2 (F-02B-03)

Product Environmental Information Data Sheet (PEIDS)

Document control no.	F-02B-03	Unit Function DB version	v 2.1	۵ ۵
Product vendor	Canon Inc.	Characterization Factor DB version	v 2.1	製
EcoLeaf registration no.	AD-15-E532	-		http



LEAF 品環境情報

				Life Ovela Store		Produ	ation				D
				Life Cycle Stage	Unit		1	Distribution	Use	Disposition	Recycle effect
In/Out item	ns					Raw material	Product	0.555	-	0.505	
		Energy	Consumption		MJ	2.49E+04	5.00E+03	9.53E+02	5.12E+04	2.53E+02	-1.55E+04
					Mcal	5.94E+03	1.19E+03	2.28E+02	1.22E+04	6.04E+01	-3.71E+03
				Coal	kg	2.77E+02	3.36E+01	2.23E-03	2.91E+02	1.22E+00	-1.88E+02
			Energy	Crude oil (as a fuel)	kg	2.04E+02	3.81E+01	2.08E+01	3.99E+02	2.95E+00	-1.03E+02
				Natural Gas	kg	4.47E+01	1.78E+01	3.22E-01	1.30E+02	6.36E-01	-2.46E+01
				Uranium ore	kg	3.85E-03	2.27E-03	1.51E-07	1.32E-02	8.25E-05	-7.40E-04
				Crude oil (as an ingredients)	kg	6.80E+01	0	0	1.22E+02	0	-7.53E+01
				Iron ore	kg	2.30E+02	0	0	8.00E+01	0	-1.68E+02
				Copper ore	kg	2.84E+00	0	0	6.67E-01	0	-1.24E+00
	t J			Bauxite	kg	1.05E+01	0	0	8.30E+00	0	-1.25E+01
	ptic	ole		Nickel ore	kg	1.15E+00	0	0	2.22E+00	0	-2.67E+00
	mn	Exhaustible resources		Chromium ore	kg	1.63E+00	0	0	3.03E+00	0	-3.68E+00
	ons vvir	hau		manganese ore	kg	1.41E+00	0	0	7.82E-01	0	-5.23E-01
	O e e	Ex	Matadal	Plumbous ore	kg	2.32E-01	0	0	5.42E-02	0	-1.01E-01
	urc		Material	Tin ore	kg	0	0	0	0	0	0
	Resource Consumption from the environment			Zinc ore	kg	2.28E+00	0	0	5.33E-01	0	-9.94E-01
	μ, μ			Gold ore	kg	0	0	0	0	0	0
				Silver ore	kg	0	0	0	0	0	0
				Silica ore	kg	7.64E+00	0	0	1.25E+00	0	-2.22E+00
()				Rock salt	kg	5.09E+01	0	0	2.06E+01	1.29E-01	-3.86E+01
Inventory analyses				Limestone	kg	4.97E+01	0	0	1.69E+01	9.95E-01	-2.85E+01
ylar				Natural soda ash	kg	4.56E-01	0	0	1.65E-02	0	-9.83E-02
ar <	ŀ	Ben	newable	Wood	kg	9.48E+01	0	0	6.70E+01	0	-9.67E+01
tor			ources	Water	kg	1.06E+05	2.55E+04	1.69E+00	2.25E+05	9.86E+02	-3.99E+04
ven				CO ₂	kg	1.48E+03	2.64E+02	6.77E+01	2.27E+03	7.03E+01	-8.48E+02
ц.				SOx	kg	1.13E+00	1.99E-01	4.26E-02	1.82E+00	6.15E-02	-8.35E-01
				NOx	kg	1.67E+00	1.62E-01	3.41E-01	2.30E+00	1.71E-01	-1.15E+00
				N0x N2 ₀		1.13E-01	6.19E-03	1.10E-02	1.33E-01	3.22E-04	-7.47E-02
		to A+	mosphere	CH ₄	kg	1.01E-02	6.08E-03	4.03E-07	3.51E-02	2.21E-04	-1.73E-03
		to Au	nosphere	CO	kg	2.66E-01	3.91E-02	9.54E-02	4.06E-01	4.23E-02	-1.73E-03
				NMVOC	kg	1.97E-02	1.19E-02	9.54E-02 7.90E-07	4.06E-01 6.87E-02	4.23E-02 4.32E-04	-2.00E-01
	arge ent			CxHy	kg	5.51E-02	1.19E-02 1.16E-03	1.00E-02	5.46E-02	4.32E-04 1.49E-03	-3.39E-03
	che			dust	kg	2.07E-02	8.55E-03	3.26E-02	5.46E-02 2.08E-01	1.49E-03	-3.65E-02
	Emission/Discharge to the environment			BOD	kg						
	on/ en				kg	-	-	-	-	-	-
	issi the		au arrete	COD	kg	-			-	-	-
	to to	to wat	ter system	N total	kg	-	-	-	-	-	-
				P total	kg	-	-	-	-	-	-
				SS	kg	-	-	-	-	-	-
				Unspecified solid waste	kg	1.10E+01	0	0	1.43E+01	1.63E+02	-1.24E+01
			il evetere	Slag	kg	7.77E+01	0	0	2.74E+01	0	-5.37E+01
		to So	oil system	Sludge	kg	2.25E+01	0	0	1.78E+01	0	-2.68E+01
				Low emission radioactive waste	kg	2.70E-03	1.59E-03	1.05E-07	9.20E-03	5.76E-05	-5.18E-04
				Energy resources	ka	4.67E+02	9.97E+01	2.12E+01	8.50E+02	5.17E+00	-2.59E+02
	by Resource		austible	(crude oil equivalent)	kg	4.07L 102	5.37E-01	2.1201	0.002+02	0.172,00	2.092 102
ţ	Consumption	res	ources	Mineral resources (Iron ore equivalent)	kg	2.08E+03	0	0	2.12E+03	0	-2.73E+03
ssmer				Global warming (CO ₂ equivalent)	kg	1.51E+03	2.66E+02	7.06E+01	2.31E+03	7.04E+01	-8.68E+02
asse	b.	to Atr	mosphere	Acidification (SO ₂ equivalent)	kg	2.30E+00	3.13E-01	2.82E-01	3.44E+00	1.81E-01	-1.64E+00
Impact assessment	by Emission/Dis charge to the										
7	environment	to Wat	er system								
		to So	il system								
		10 00	oyotoni								

[Notes for readers: EcoLeaf common rules]

I. Stage related

- A. "Production" stage is intended for two sub-stages listed below.
 - (1) "Raw material" production: consists of mining, transportation and raw material production.
 - (2) "Product" production: consists of the parts processing, assembly and installation.
- B. "Distribution" stage is intended for transportation of produced product.

Transportation of consumables and maintenance goods (e.g. replacement parts) for use of the product are included into "Use" stage.

- C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal/recycle of consumables/maintenance goods (e.g. replacement parts).
- D. "Disposition/Recycle" stage is intended for environmental impacts by product disposition/recycle, and deduction by recycling (e.g. impact reduction of raw material production).
- E. "Recycle Effect" illustrates an indirect environmental influences to other products/services by use of reclaimed materials/parts, and/or by supply of used products to other businesses for material reclaim/parts reuse.

Case 1: Use of reclaimed materials/parts: Sum of increase of environmental impact by collection activities of used materials/parts, and decrease by volume reduction of used materials/parts.

Case 2: Supply of used products to other businesses for material reclaim/parts reuse: Sum of increase of environmental impact by materials/parts reclaiming process, and decrease by volume reduction of new materials/parts production.

II. Inventory analyses

A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g. iron, aluminum) in the ore.

- B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.
- C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III Impact analyses

Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO₂ in case of "Global Warming").

A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.

B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, Water and Soil system.

IV Data entry format

- A. Exponential notation, after the decimal point to two, should be used.
- B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.
- C. Indicate if calculation nor estimation can not be done, in order to differentiate to indicate "zero".

(BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

[Notes for readers: Target product specific]

1. "Raw material" in Production:

This product uses carrier (electrographic developer) in the image development process.

2. "Product" in Producton:

3. Distribution:

Distance of domestic transportation is regarded as 100km according to PCR(AD-04).

4. Use:

- Based on the PCR, energy consumption and print volume are calculated from TEC method.
- 2,150,400 sheets are printed during the use period of 5 years.
- Environmental load of "producing" and "disposal and recycling" of consumable goods are allocated to this stage.
- The coverage on the paper is 5%(A4) by using standard chart.
- Distance of domestic transportation of consumable goods is regarded as 100km according to PCR.
- Color print ratio is equal to black-and-white print ratio.

5. Disposal and recycle:

6. Others:

This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

3 / 4 ページ

Form3 (F-03-03)

Do

Product data sheet

	(Input data and parameters for LCA)
ument control no.	F-03-03
Product vendor	Canon Inc.
Eaf registration no.	AD-15-E532



Product type Canon imagePRESS C60 LCA/LCIA in units of: eight (kg) Weight total (kg) Pro 83 316 39

1. Product information (per unit): parts etc. by material and by process/assembly method

		E	Ireakdown of primary materials		Math breakdown of parts, which need to apply Processing / Assembly Base Units (Parts B, C)				
	Material name	Weight (kg)	Material name	Weight (kg)	Process name	Weight (kg)	Process name	Weight (kg)	
	Ordinary steel	2.20E+02	Glass	2.93E+00	Press molding:Iron	2.25E+02	Parts assembly	3.21E+02	
	Stainless steel	7.24E+00	Paper	2.99E+01	Press moldingNonferrous metal	1.55E+01			
duct	Aluminium	9.92E+00	PCB	8.46E+00	Injection molding	7.56E+01			
	Other metals	5.55E+00	Wood	3.11E+01					
۲, E	Thermoplastic resin	7.74E+01	Recycled plastic	3.45E+00	Glass molding	2.93E+00			
	Thermosetting resin	2.25E+00							
	Rubber	1.08E+00							
	Subtotal	3.23E+02 Subtotal		7.58E+01					
		To	tal	3.99E+02	Subtotal	3.19E+02	Subtotal	3.21E+02	
[Note]									

2. Production site information (per unit): Consumption and discharge/emission for production/processing/assembly within the site.

	IOx should be indicated in					· • • • • • • • • • • • • • • • • • • •	 	
ion	Classification	Consumption	Consumption	Consumption	Consumption	Consumption		
mpti	Distribution	Electricity(kWh)	Furnace urban gas(m ³)	Industrial water(kg)	Clean water(kg)	Groundwater(kg)		
nsu	Quantity	1.71E+02	1.23E+00	5.48E-02	3.72E-04	3.54E+01		
റ്	Note							
\ e	Classification							
sion.	Distribution							
Emission / Discharge	Quantity							
шO	Note							
[Note]								

3. Distribution stage information (per unit): means, distance, loading ratio, consumptions and emissions/discharges.

ь Б	Means of transportation	Diesel truck:4ton	Diesel truck:15ton	Freight by ship				
istributio	Conditions	Load(kg•km)	Load(kg•km)	Load(kg•km)				
	Quantity	6.08E+04	1.28E+05	1.01E+06				
ā	Note							
[Note]			•		•	•	•	

Use stage (per unit): use condition (mode, term) including active mode, standby mode and maintenance. Product and accessories subject to this analysis

	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption		
	Distribution	Electricity(kWh)	Electricity(kWh)	Furnace urban gas(m3)	Industrial water(kg)	Clean water(kg)	Groundwater(kg)		
	Quantity	2.23E+03	7.30E+02	5.86E+00	2.60E-01	1.77E-03	7.32E+02		
	Note								
	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Ordinary steel(kg)	Stainless steel(kg)	Aluminium(kg)	Other metal(kg)	Glass(kg)	Thermoplastic resin(kg)	Thermosetting resin(kg)	Wood(kg)
Product	Quantity	7.28E+01	1.40E+01	7.85E+00	1.91E+00	2.75E-03	1.64E+02	1.36E-01	3.88E-02
	Note								
	Classification	Consumption	Consumption	Consumption					
-	Distribution	Paper(kg)	Rubber(kg)	PCB(kg)					
	Quantity	3.14E+01	2.09E+00	6.57E-01					
	Note								
	Classification	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption	Consumption
	Distribution	Press molding:Iron(kg)	Press molding:Nonferrous metal(kg)	Injection molding(kg)	Parts assembly(kg)	Diesel truck:4ton(kg•km)	Diesel truck:10ton(kg·km)	Diesel truck:15ton(kg•km)	Freight by ship(kg·km)
-	Quantity	8.40E+01	9.75E+00	6.68E+01	1.56E+02	1.05E+04	3.95E+04	2.03E+04	1.85E+05
	Note								
[Note]									

4.2 Disposition/Recycle information on consumables and replacement parts

	Classification	Process	Process	Process	Process	Process	Process	Process	
	Distribution	Shredding(kg)	eration to landfill (as as	eration: Industrial waste	Biomass incineration(kg	andfill:general waste(kg	andfill:Industrial waste(k	Electricity (kWh)	
	Quantity	1.80E+01	1.80E+01	6.84E+00	1.50E+01	1.50E+00	6.84E-01	5.15E+00	
	Note								
	Classification	Process	Process	Process	Process	Process	Process	Process	Process
	Distribution	Shredding(kg)	Sorting Iron	Sorting other metal	Sorting Plastics	lecycle to Ordinary stee	Recycle to copper plate	Recycle to aluminum plate	Recycle to Thermoplastic resin
nables	Quantity	1.45E+02	1.40E+02	5.66E+01	5.15E+01	8.40E+01	1.91E+00	7.84E+00	5.27E+01
	Note								
Insu	Classification	Process	Process	Deduction	Deduction	Deduction	Deduction		
රි	Distribution	Recycle to corrugated board	Recycle to Paper	Ordinary steel(kg)	Stainless steel(kg)	Aluminium(kg)	Other metal(kg)		
	Quantity	1.63E+01	1.78E-01	-7.00E+01	-1.40E+01	-7.84E+00	-1.91E+00		
	Note								
	Classification	Deduction	Deduction	Deduction					
	Distribution	Thermoplastic resin(kg)	Paper(kg)	Rubber(kg)					
	Quantity	-5.27E+01	-1.64E+01	-2.04E+00					
	Note								

[Note]

5. Disposition/Recycle stage information (per product): process method and scenarios

	Classification	Process	Process	Process	Process	Process	Process	Process	Process
	Distribution	Diesel truck:4ton(kg•km)	liesel truck:10ton(kg•kn	Electricity (kWh)	Shredding(kg)	Incineration to landfill (as ash)(kg)	Incineration: Industrial waste (kg)	Biomass incineration(kg)	Landfill:general waste(kg)
	Quantity	1.91E+04	3.18E+04	6.76E+00	1.96E+02	4.26E+01	7.67E-01	3.19E+01	1.54E+02
	Note								
	Classification	Process	Process	Process	Process	Process	Process	Process	Process
	Distribution	Landfill:Industrial waste(kg)	Shredding(kg)	Sorting Iron	Sorting other metal	Sorting Plastics	Recycle to Ordinary steel	Recycle to copper plate	Recycle to aluminum plate
0	Quantity	3.18E+00	1.51E+02	1.18E+02	3.62E+01	3.37E+01	8.98E+01	2.22E+00	3.96E+00
ario	Note								
Scer	Classification	Process	Process	Process	Process	Deduction	Deduction	Deduction	
00	Distribution	Recycle to Thermoplastic resin	Recycle to corrugated board	Recycle to Paper	Recycle to Glass	Ordinary steel(kg)	Stainless steel(kg)	Aluminium(kg)	
	Quantity	3.38E+01	2.89E+01	1.17E-01	1.17E+00	-8.69E+01	-2.88E+00	-3.96E+00	
	Note								
	Classification	Deduction	Deduction	Deduction	Deduction	Deduction			
	Distribution	Other metal(kg)	Glass(kg)	Thermoplastic resin(kg)	Paper(kg)	Rubber(kg)			
	Quantity	-2.22E+00	-1.17E+00	-3.38E+01	-2.90E+01	-4.32E-01			
	Note								

6. Others:

This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.