Product Environmental Aspects Declaration

Network camera (PCR No.BH-01)



No. BH-09-049 Date of publication March 06, 2009

Panasonic

http://panasonic.co.jp/pcc/products/en/netwkcam/

Panasonic System Networks Co.,Ltd.
Security Systems Business Division
TEL:81-92-477-2137 FAX:81-92-477-1487
MAIL ecoleaf@gg.jp.panasonic.com



Sensor Camera

Product Specification

VL-CM260

1) Lens: Fixed Focus 3.6mm, F 2.8, Non - Optical Zoom 2) Image Sensor: 1/4-inch CMOS Sensor 320,000 pixels

3) Network Interface : 10Base-T/100Base-TX4) Mechanism : Non - Pan/Tilt Mechanism


5) Video Compression: H.264, JPEG(VGA:7.5fps,QVGA:15fps)

6) Installation environment of a camera: Outdoor use 7) Weight [catalog]: about 365g (0.805 lb.) (Only the unit)

Life Cycle Impacts

	Total,all stage
Global warming(CO ₂ equivalent)	68.8 kg
Acidification(SO ₂ equivalent)	0.098 kg
Energy Consumption	1,450 MJ

Global warming Impact (CO₂ equivalent)

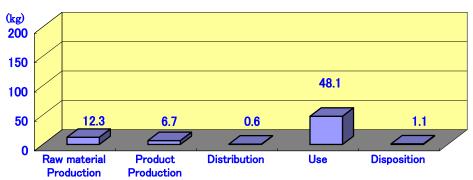

The main part of a product, manuals, accessories, packing material, and the set box are contained in the range for public presentation. The conditions of a use stage: usable-years five years, picture transmitting time 30 minute/one day, In picture transmitting time 30 minute, standby status 23.5 hours / one dayn.

Notes:

- 1. Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
- Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR: Product Category Rule.
 Visit EcoLeaf website under JEMAI homepage at http://www.jemai.or.jp/ecoleaf_e/ for details.
- Although this product is manufactured in Malaysia, Japanese data have been used as EcoLeaf generic data, instead of Malyasia data that have not been developed.

[Supplemental environmental information]

Assembly production of this product and production of a mounting circuit board are performed at the ISO 14001 authorization acquisition factory.

Specific brominated flame retardants(PBB and PBDE) are not used in appearance plastic material.

Pb-free solder is used for the main circuit board.

A chrome free surface treated steel plate that doesn't contain the hexavalent chromium is used for the sheet metal of the product.

PCR review was conducted by :the chair Mr.Hisashi Ishitani, KEIO University at PCR Deliberation Committee in January 1, 2008. Independent verification of the declaration and data, according to ISO14025:2006 ☐ internal ■ external Third party verifier: name of the third party verifier *was Mr.Keiichi Aramaki.

Programme operator: Japan Environmental Management Association for Industry, ecoleaf@jemai.or.jp

^{*} In the case of an business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written.

Product Environmental Information Data Sheet (PEIDS)



Document control no.	F-02As-02
Product vendor	Panasonic System Networks Co.,Ltd.
EcoLeaf registration no.	BH-09-049

Unit Function DB version

Characterization Factor DB version

nttp://www.jemanorijp	
v2.1	
v2 1	

PCR name	Network Came	Product type	SENSOR CAMERA VL-CM260				
PCR code	BH-01	Product weight (kg)	0.36	Package (kg)	1.35	Weight total (kg)	1.71

				Life Cycle Stage		Produ	uction				
In/Oı	ut iten	ns			Unit	Raw material	Product	Distribution	Use	Disposition	Total
111/00	ut iteri	110			MJ	2.08E+02	1.48E+02	8.61E+00	1.08E+03	1.69E+00	1.45E+03
		Er	nergy (Consumption	Mcal	4.98E+01	3.53E+01	2.06E+00	2.59E+02	4.03E-01	3.46E+02
	1	1 1	Se	Coal	kg	1.29E+00	8.61E-01	2.01E-05	6.16E+00	8.12E-03	8.33E+00
			onro	Crude oil (for fuel)	ka	2.32E+00	9.73E-01	1.88E-01	6.97E+00	2.18E-02	1.05E+01
			y res	LNG	kg	5.00E-01	4.30E-01	2.90E-03	3.08E+00	4.29E-03	4.02E+00
			Energy	Uranium content of an ore	kg	3.88E-05	5.83E-05	1.36E-09	4.17E-04	5.49E-07	5.15E-04
	_ ا	H	ш	Crude oil (for material)	kg	4.25E-01	0	0	0	0	4.25E-01
	Ϊ́Ξ			Iron content of an ore	kg	5.40E-02	0	0	0	0	5.40E-02
	npi	resources		Cu content of an ore	kg	2.30E-02	0	0	0	0	2.30E-02
	۱ä	일		Al content of an ore	kg	2.74E-01	0	0	0	0	2.74E-01
	l si	801		Ni content of an ore	kg	2.79E-03	0	0	0	0	2.79E-03
	ŏ	<u>ë</u>	ĕ	C content of an ore	kg	3.80E-03	0	0	0	0	3.80E-03
	Se	<u>e</u>	ž	Mn content of an ore	kg	7.36E-04	0	0	0	Ö	7.36E-04
	Ιğ	stik	SO	Pb content of an ore	kg	1.86E-03	0	0	0	0	1.86E-03
	Se	aus	5	Sn content of an ore	kg	-	-	-	-	-	1.002 00
	Ä	Exhaustible	ā	Zn content of an ore	kg	1.83E-02	0	0	0	0	1.83E-02
	Impact by Resource Consumption	Ш	Mineral resources	Au content of an ore	kg	-	-	-	-	-	
	ぢ		Σ	Ag content of an ore	kg	-	-	-	-	_	
S	pa			Silica Sand	kg	2.83E-02	0	0	0	0	2.83E-02
Şe	<u>=</u>			Halite	kg	4.72E-01	0	0	0	8.47E-04	4.73E-01
aj.				Limestone	kg	4.43E-02	0	0	0	9.78E-03	5.41E-02
an				Natural soda ash	kg	2.37E-03	0	0	0	0	2.37E-03
				Wood	kg	1.66E+00	0	0	0	0	1.66E+00
Inventory anaiyses			1	Water	kg	1.45E+03	6.52E+02	1.52E-02	4.67E+03	6.78E+00	6.78E+03
\ \	-Lu		CO2		kg	1.20E+01	6.69E+00	6.12E-01	4.79E+01	1.09E+00	6.83E+01
⊑	Ĕ		a)	Sox	kg	1.60E-02	5.11E-03	3.30E-04	3.66E-02	5.90E-04	5.86E-02
	ī		ē	Nox	kg	2.01E-02	4.05E-03	2.18E-03	2.90E-02	1.56E-03	5.69E-02
	2		di di	N2O	kg	1.19E-03	7.31E-05	1.13E-04	5.23E-04	2.49E-06	1.90E-03
	e		200	CH4	kg	9.88E-05	1.56E-04	3.64E-09	1.12E-03	1.47E-06	1.37E-03
	ŧ		Ħ	CO	kg	3.02E-03	9.89E-04	4.35E-04	7.08E-03	3.67E-04	1.19E-02
	e to		to Atmosphere	NMVOC	kg	1.93E-04	3.05E-04	7.13E-09	2.19E-03	2.88E-06	2.69E-03
	ırge		-	СхНу	kg	4.95E-04	1.59E-05	7.66E-05	1.14E-04	1.19E-05	7.13E-04
	Emission/Discharge to the environmen			Dust	kg	1.88E-03	2.18E-04	2.23E-04	1.56E-03	9.75E-05	3.98E-03
	Disi	tem	Jain	BOD	kg	-	-	-	-	-	
	J/u	to Water system	to Water domain	COD	kg	-	-	-	-	-	
	ssic	ater	ter	N total	kg	-	-	-	-	-	
	mis	×	Wa	P total	kg	-	-	-	-	-	
	Ē/	\$		SS	kg	- 4.005.04	-	-	-	- 4.00E+00	4.005.00
	t b		system	Unspecified Solid Waste	kg	1.38E-01	0	0	0	1.06E+00	1.20E+00
	act		il sy.	Slag	kg	7.87E-02	0	0	0	0	7.87E-02
	Impact by		Soil	Sludge	kg	5.88E-01 2.72E-05	4.06E-05	9.52E-10	2.91E-04	3.84E-07	5.88E-01 3.59E-04
+			7	Low level radio-active waste	kg	4.07E+00	2.52E+00	1.92E-01	1.81E+01	3.66E-02	2.49E+01
mpact assessment	by Res		-	Mineral resources (fron ore equivalent)	kg kg	9.95E+00	2.32E+00	0	1.01E+01	0.00E-02	9.95E+00
ssm	- 1		Ф	Global Warming (CO2 equivalent)	kg kg	1.23E+01	6.71E+00	6.42E-01	4.81E+01	1.09E+00	6.88E+01
ses	entrara		phe	Acidification (SO2 equivalent)	kg kg	3.00E-02	7.94E-03	1.86E-03	5.69E-02	1.68E-03	9.84E-02
t as	d sgratt		mos	Acidinication (SOZ equivalent)	кy	0.00L-02	7.346-03	1.00L-03	0.03L-02	1.00L-03	3.04L-02
act	ion / Disc	to Atmosphere		Photochemical Oxidant	ka	1.05E-03	2.25E-04	1.22E-04	1.61E-03	4.62E-05	3.05E-03
g d	by Brass			i notocnemical Oxidant	ĸg	1.002 00	2.202 07	1.222 07	1.012 00	7.022 00	0.001 00

[Notes for readers: EcoLeaf common rules]

I. Stage related

- A. "Production" stage is intended for two sub-stages listed below.
- (1) "Raw material" production: consists of mining, transportation and raw material production.
- (2) "Product" production: consists of the parts processing, assembly and installation.
- B. "Distribution" stage is intended for transportation of produced product. Transportation of consumables and maintenance goods (e.g. replacement parts) for use of the product are included into "Use" stage.
- C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal of consumables/maintenance goods (e.g. replacement parts).
- D. "Disposition" stage is intended for environmental impacts by product disposition.

II. Inventory analyses

- A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g. iron, aluminum) in the ore.
- B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.
- C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III Impact analyses

Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO₂ in case of "Global Warming").

A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.

 $\textbf{B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, \textbf{Water and Soil system}.}\\$

IV Data entry format

- $\ensuremath{\mathrm{A.}}$ Exponential notation, after the decimal point to two, should be used.
- B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.
- C. Indicate " " if calculation nor estimation can not be done, in order to differentiate to indicate "zero".
- D. Row total of the data is automatically calculated, excluding a row includes " " item. Row total of such is presented as a blank (no data).

 (BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

Product data sheet

(Input data and parameters for LCA)

	(input data and parameters for Eo/t)
Document control no.	F-03s-02
Product vendor	Panasonic System Networks Co.,Ltd.
EcoLEaf registration no.	BH-09-049



PCR name	Network Camera (PCR-ID: BH-01)	Product type	SENSOR CAMERA VL-CM260				
LCA/LCIA in units of:	1unit	Product weight (kg)	0.36	Package (kg)	1.35	Weight total (kg)	1.71

1. Product information (per unit): parts etc. by material and by process/assembly method

	Bro	eakdown of p	rimary materials		Math breakdown of parts, which	ch need to apply	Processing / Assembly Base U	Inits (Parts B, C)
	Material name	Weight (kg)	Material name	Weight (kg)	Process name	Weight (kg)	Process name	Weight (kg)
	Steel	2.38E-02	Paper	7.65E-01	Press molding:Iron (kg)	3.01E-02		
	Electroplated steel Plate	2.26E-02	Assembled circuit board	9.56E-02	Injection molding (kg)	1.58E+00		
ب	Electromagnetic steel plate	4.00E-05						
Product	Stainless steel	1.77E-02						
ĕ	Copper	3.24E-02						
<u> </u>	Aluminum	2.59E-01						
	Thermoplastic resin	4.80E-01						
	Rubber	1.31E-02						
	Subtotal	8.48E-01	Subtotal	8.61E-01				
		Total		1.71E+00	Subtotal	1.61E+00	Subtotal	0.00E+00

Note Product mass includes the main part of a camera. Accessories, such as the packing material, CD-ROM, and AC adapter, are appropriated for packing etc.

2. Production site information (per unit): Consumption and discharge/emission for production/processing/assembly within the site.

SOx and NOx should be indicated in SO₂, NO₂ equivalent.

_	Classification	Energy				
Consumption	Distribution	Electricity (kWh)				
Ę	Quantity	1.43E+01				
	Note					
Emission/Discharge	Classification					
	Distribution					
	Quantity					
	Note					

Note On the manufacture stage, the manufacture load of printed circuit board mounting and the manufacture load of the main part assembly are added up.

3. Distribution stage information (per unit): means, distance, loading ratio, consumptions and emissions/discharges.

	Means of transportation	Consumption	Consumption	Consumption	Consumption		
Distribution	Conditions	Freight by ship (kg.km)	Diesel oil as fuel (kg)	Diesel truck: 10 ton (kg.km)	Diesel truck: 4 ton (kg.km)		
		1.03E+04	4.20E-03	7.92E+02	2.34E+01		
	Note						

Note The load of the land and marine transportation from the overseas manufacturing site to Japan are added up.

As for domestic transportation, distance is set to 500km according to the PCR regulation.

4. Use stage (per unit): use condition (mode, term) including active mode, standby mode and maintenance.

4.1 Product and accessories subject to this analysis

4.1 Pro	.1 Product and accessories subject to this analysis											
	Classification	Consumption										
Product	Distribution	Electricity (kWh)										
	Quantity	1.15E+02										
	Note											

Note According to PCR regulation, usable period, the picture transmitting time and the standby time were assumed to be five years, 30 minute / one day and 23 hours 30 minutes / one day, respectively.

4.2 Disposition/Recycle information on consumables and replacement parts

səlc	Classification				
	Distribution				
	Quantity				
	Note				

Note There is not article of consumption of this model.

5. Disposition/Recycle stage information (per product): process method and scenarios

.و	Classification		Consumption	Discharge	Discharge		
	- Ciacomoanori	Condumption	Consumption		,		
	Distribution	Diesel truck: 4 ton (kg.km)	Shredding (kg)	Incineration to landfill (as ash) (kg)	Landfill: General waste (kg)		
	Quantity	3.42E+02	1.71E+00	7.70E-01	9.40E-01		
	Note	•					

Note The product is crushed as wastes. The inflammables are appropriated for "Incineration", and the incombustibles are appropriated for "Landfill" afterwards.