

Product Environmental Aspects Declaration



EP and IJ printer (PCR-ID:AD-04)

No. AD-19-E1159
Date of publication
09/24/2019

TOSHIBA

e-STUDIO2829A


TOSHIBA TEC CORPORATION
Corporate Quality & Environmental
Group
TEL: +81-3-6830-9100

1. Printing Process : Electrophotography (EP)
2. Color : Monochrome(B/W)
3. Printing Speed: 28 Letter pages per minute (B/W)
4. Maximum Paper Size : Ledger Size
5. Duplex copying : Standard



Consumption and discharge in a life cycle	All the stage sum totals
Global Warming (CO ₂ equivalent)	592.3kg (567.0kg)
Acidification (SO ₂ equivalent)	1.41kg (1.36kg)
Energy resources (crude oil equivalent)	10,892MJ (10,358MJ)

※Figures in () indicated environmental impact including recycle effect *note3

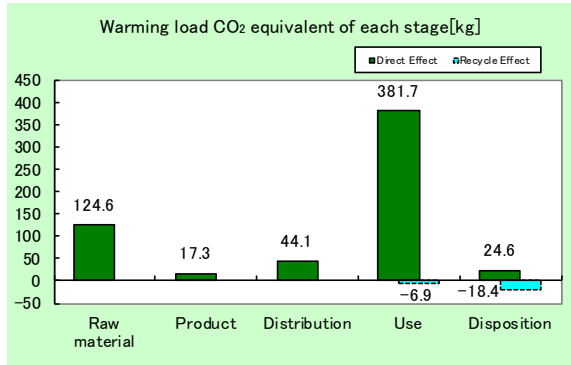

The above environmental load is calculated assuming that the usage period is 5 years and the total number of printed sheets is 470,400 pages. Also, the printing paper is not included in the calculation range. Inside the red frame of the photo is not included in the LCA calculation because it is the accessories (Automatic Document Feeder).

Notes:

1. Original LCA data is available on PEIDS: Product Environmental Information Declaration Sheet, and Product Data Sheet.
2. Unified rules and requirements for EcoLeaf LCA, for intended product category, are available as a PCR: Product Category Rule. Visit EcoLeaf website under JEMAI homepage at http://www.ecoleaf_jemai.jp/eng/ for details.
3. Recycle Effect illustrates an indirect influence to other products/services.
4. Basic Units used for calculations are based on Japan domestic data at this time, due to a lack of base data to establish localized Basic Unit for overseas locations adequately.
5. This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

[Supplemental environmental information]

- Certified to the international ENERGY STAR Program V3.0, EU RoHS
- Manufactured at ISO14001 certified factories

PCR review was conducted by : PCR Deliberation Committee, January 01, 2008, Name of representative: Youji Uchiyama, University of Tsukuba, Graduate School Independent verification of the declaration and data, according to ISO14025:2006 <input type="checkbox"/> internal <input checked="" type="checkbox"/> external Third party verifier: Yasuo Koseki Programme operator: Japan Environmental Management Association for Industry, ecoleaf@jemai.or.jp
--

* In the case of an business entity certified as an Ecoleaf-data-collection system, the names of certification auditors are written. The Ecoleaf is an environmental labeling program that belongs to the ISO-TypeIII category.

Product Environmental Information Data Sheet (PEIDS)



Document control no.	F-02Bs-02
Product vendor	TOSHIBA TEC CORPORATION
EcoLeaf registration no.	AD-19-E1159

Unit Function DB version	v2.1
Characterization Factor DB version	v2.1

PCR name	EP and IJ printer		Product type	TOSHIBA MFP e-STUDIO2829A			
PCR code	AD-04	Product weight (kg)	24.5	Package (kg)	6.5	Weight total (kg)	31.0

In/Out items	Life Cycle Stage	Unit	Production		Distribution	Use	Disposition	Recycle Effect			
			Raw material	Product							
Energy Consumption			MJ	2.46E+03	3.16E+02	6.07E+02	7.46E+03	4.47E+01	-5.34E+02		
			Mcal	5.88E+02	7.55E+01	1.45E+02	1.78E+03	1.07E+01	-1.28E+02		
Inventory analyses	Impact by Resource Consumption	Energy resources	Coal	kg	1.33E+01	2.18E+00	1.42E-03	2.86E+01	1.65E-01	-4.05E+00	
			Crude oil (for fuel)	kg	2.45E+01	2.54E+00	1.33E+01	6.97E+01	6.71E-01	-4.06E+00	
			LNG	kg	4.30E+00	1.20E+00	2.05E-01	1.61E+01	9.07E-02	-3.69E-01	
			Uranium content of an ore	kg	3.73E-04	1.47E-04	9.61E-08	1.66E-03	1.12E-05	-9.51E-06	
			Crude oil (for material)	kg	1.26E+01	0	0	2.48E+01	0	-4.43E+00	
		Exhaustible resources	Mineral resources	Iron content of an ore	kg	8.97E+00	0	0	3.22E+00	0	-3.95E+00
				Cu content of an ore	kg	4.55E-01	0	0	7.46E-03	0	-7.09E-02
				Al content of an ore	kg	2.27E-01	0	0	5.98E-01	0	-3.02E-01
				Ni content of an ore	kg	4.10E-02	0	0	3.90E-03	0	-8.04E-05
				C content of an ore	kg	5.83E-02	0	0	6.40E-03	0	-1.47E-03
	Mn content of an ore			kg	4.97E-02	0	0	1.77E-02	0	-1.48E-03	
	Pb content of an ore			kg	2.45E-02	0	0	6.05E-04	0	-5.76E-03	
	Sn content of an ore			kg	0	0	0	0	0	0	
	Zn content of an ore			kg	2.41E-01	0	0	5.96E-03	0	-5.66E-02	
	Au content of an ore			kg	0	0	0	0	0	0	
	Ag content of an ore			kg	0	0	0	0	0	0	
	Silica Sand			kg	1.30E+00	0	0	5.19E-02	0	-3.82E-01	
	Halite			kg	7.34E+00	1.19E-04	0	1.23E+00	1.10E-02	-2.02E+00	
	Limestone			kg	2.22E+00	0	0	1.86E+00	4.32E-01	-7.61E-01	
	Natural soda ash			kg	1.28E-01	0	0	1.34E-03	0	-3.89E-02	
Renewable resources	Wood	kg	9.77E+00	0	0	2.34E+01	0	0			
	Water	kg	8.81E+03	1.67E+03	1.06E+00	2.60E+04	1.39E+02	-7.21E+02			
Impact by Emission/Discharge to the environment	to Atmosphere	CO ₂	kg	1.21E+02	1.72E+01	4.30E+01	3.75E+02	2.46E+01	-2.45E+01		
		SO _x	kg	7.33E-02	1.29E-02	3.83E-02	2.64E-01	1.37E-02	-2.04E-02		
		NO _x	kg	1.63E-01	1.07E-02	4.15E-01	8.07E-01	4.56E-02	-3.90E-02		
		N ₂ O	kg	1.28E-02	3.12E-04	4.28E-03	2.40E-02	6.46E-05	-3.14E-03		
		CH ₄	kg	9.95E-04	3.94E-04	2.57E-07	4.43E-03	2.99E-05	-2.00E-05		
		CO	kg	1.52E-02	2.61E-03	1.49E-01	2.04E-01	1.15E-02	-4.62E-03		
		NM VOC	kg	1.95E-03	7.71E-04	5.03E-07	8.68E-03	5.85E-05	-3.93E-05		
		C _x H _y	kg	5.88E-03	6.94E-05	9.41E-03	1.84E-02	4.41E-04	-1.54E-03		
		Dust	kg	1.73E-02	5.89E-04	3.47E-02	6.65E-02	2.53E-03	-5.31E-03		
		to Water system	BOD	kg	-	-	-	-	-	-	
	COD		kg	-	-	-	-	-	-		
	N total		kg	-	-	-	-	-	-		
	P total		kg	-	-	-	-	-	-		
	SS		kg	-	-	-	-	-	-		
	to Soil system		Unspecified Solid Waste	kg	1.36E+00	6.69E-04	0	6.09E+00	9.47E+00	-2.70E-01	
			Slag	kg	3.28E+00	0	0	9.95E-01	0	-1.26E+00	
			Sludge	kg	3.41E-01	0	0	1.28E+00	0	-6.49E-01	
		Low level radio-active waste	kg	2.61E-04	1.03E-04	6.73E-08	1.16E-03	7.80E-06	-6.70E-06		
Impact assessment by Resource Consumption	Exhaustible resources	Energy resources (crude oil equivalent)	kg	4.13E+01	6.58E+00	1.35E+01	1.21E+02	9.77E-01	-7.19E+00		
		Mineral resources (Iron ore equivalent)	kg	1.58E+02	0	0	2.39E+01	0	-2.85E+01		
	to Atmosphere	Global Warming (CO ₂ equivalent)	kg	1.25E+02	1.73E+01	4.41E+01	3.82E+02	2.46E+01	-2.54E+01		
		Acidification (SO ₂ equivalent)	kg	1.87E-01	2.05E-02	3.29E-01	8.29E-01	4.56E-02	-4.77E-02		
-	-	-	-	-	-	-	-	-			
-	-	-	-	-	-	-	-	-			

[Notes for readers: EcoLeaf common rules]

I. Stage related

A. "Production" stage is intended for two sub-stages listed below.

- "Raw material" production: consists of mining, transportation and raw material production.
- "Product" production: consists of the parts processing, assembly and installation.

B. "Distribution" stage is intended for transportation of produced product. Transportation of consumables and maintenance goods (e.g. replacement parts) for use of the product are included into "Use" stage.

C. "Use" stage is intended for use of the product (active mode, standby mode, etc.) and production, transportation to disposal/recycle of consumables/maintenance goods (e.g. replacement parts).

D. "Disposition/Recycle" stage is intended for environmental impacts by product disposition/recycle, and deduction by recycling (e.g. impact reduction of raw material production).

E. "Recycle Effect" illustrates an indirect environmental influences to other products/services by use of reclaimed materials/parts, and/or by supply of used products to other businesses for material reclaim/parts reuse.

Case 1: Use of reclaimed materials/parts: Sum of increase of environmental impact by collection activities of used materials/parts, and decrease by volume reduction of used materials/parts.

Case 2: Supply of used products to other businesses for material reclaim/parts reuse: Sum of increase of environmental impact by materials/parts reclaiming process, and decrease by volume reduction of new materials/parts production.

II. Inventory analyses

A. Data of mineral ore on "Exhaustible resources" are presented in weight of pure ingredients (e.g. iron, aluminum) in the ore.

B. Data on energy resources are presented based on origin in calorific value. e.g. Data on uranium ore presents weight of uranium concentrate, which is available for use as an atomic fuel.

C. Data of discharge to water system are in actual figure (not calculated using unit function in inventory analyses).

III. Impact analyses

Result of the "Impact analyses" is found in converting results of inventory analyses into total amount of a reference material (e.g. CO₂ in case of "Global Warming").

A. Impact "by resource consumption" represents magnitude of impacts to resource depletion.

B. Impact "by emission/discharge to environment" represents magnitude of impacts to Atmosphere, Water and Soil system.

IV. Data entry format

A. Exponential notation, after the decimal point to two, should be used.

B. Indicate "0" instead exponential notation, if the result of calculation or estimation is considered as "zero" or negligible in comparison to related results.

C. Indicate "-" if calculation nor estimation can not be done, in order to differentiate to indicate "zero".

(BGD for material production are for production from mineral ore. Those data do not include reclaiming processes like recovery from scrap.)

[Notes for readers: Target product specific]

This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.

	Distribution	Urban gas (13A) (m3)	Furnace urban gas (13A) (m3)	Industrial water (kg)	Clean water (kg)	Sewage processing (kg)			
	Quantity	1.25E+00	1.33E-01	2.73E+01	4.74E+01	1.06E+02			
	Note								

Note

4.2 Disposition/Recycle information on consumables and replacement parts

Consumables	Classification	Process	Process	Process	Process	Process	Process	Process	Process
	Distribution	Landfill: Industrial waste (kg)	Incineration: Industrial waste (kg)	Shredding (kg)	Incineration to landfill (as ash) (kg)	Landfill: General waste (kg)	Diesel truck: 4 ton (kg·km)	Sorting: Iron (by magnetic force) (kg)	Sorting: Nonferrous metal (by eddy current with wind force) (kg)
	Quantity	4.38E-01	1.07E+01	3.40E+01	1.82E+01	2.21E+00	1.10E+04	9.23E+00	7.98E+00
	Note								
	Classification	Process	Process	Process	Process	Deduction	Deduction	Deduction	
	Distribution	Sorting: Plastics (by relative density difference in water) (kg)	Recycle: to cold-rolled steel (kg)	Recycle: to Aluminum plate (kg)	Recycle: to Thermoplastic pellet (kg)	Cold-Rolled steel plate (kg)	Aluminum plate (kg)	Polystyrene (kg)	
	Quantity	7.75E+00	1.19E+00	2.26E-01	6.52E+00	1.07E+00	2.26E-01	1.23E+00	
	Note								

Note

5. Disposition/Recycle stage information (per product): process method and scenarios

Scenario	Classification	Process	Process	Process	Process	Process	Process	Process	Process
	Distribution	Landfill: Industrial waste (kg)	Incineration: Industrial waste (kg)	Shredding (kg)	Incineration to landfill (as ash) (kg)	Landfill: General waste (kg)	Diesel truck: 10 ton (kg·km)	Diesel truck: 4 ton (kg·km)	Sorting: Iron (by magnetic force) (kg)
	Quantity	1.06E+00	4.30E+00	3.10E+01	1.21E+01	6.54E+00	1.52E+04	1.80E+03	1.01E+01
	Note								
	Classification	Process	Process	Process	Process	Process	Process	Process	Deduction
	Distribution	Sorting: Nonferrous metal (by eddy current with wind force) (kg)	Sorting: Plastics (by relative density difference in water) (kg)	Recycle: to cold-rolled steel (kg)	Recycle: to copper plate (kg)	Recycle: to Aluminum plate (kg)	Recycle: to Glass (kg)	Recycle: to Thermoplastic pellet (kg)	Cold-Rolled steel plate (kg)
	Quantity	6.86E+00	6.54E+00	3.05E+00	2.35E-01	6.00E-02	4.64E-01	5.08E+00	2.74E+00
	Note								
	Classification	Deduction	Deduction	Deduction	Deduction	Deduction	Deduction		
	Distribution	Copper plate (kg)	Aluminum plate (kg)	Polystyrene (kg)	Polycarbonate-ABS (70/30) (kg)	ABS (kg)	Glass (kg)		
Quantity	2.35E-01	6.00E-02	9.55E-01	1.92E+00	6.91E-01	4.64E-01			
Note									

Note

6. Others

This declaration was produced using Product Category Rule intended for a product model sold in the Japanese market and using the qualitative and quantitative data collected in Japan.